


REM-97S6C-7AAR-H1151

Absolute Rotary Encoder - Multiturn Industrial Line

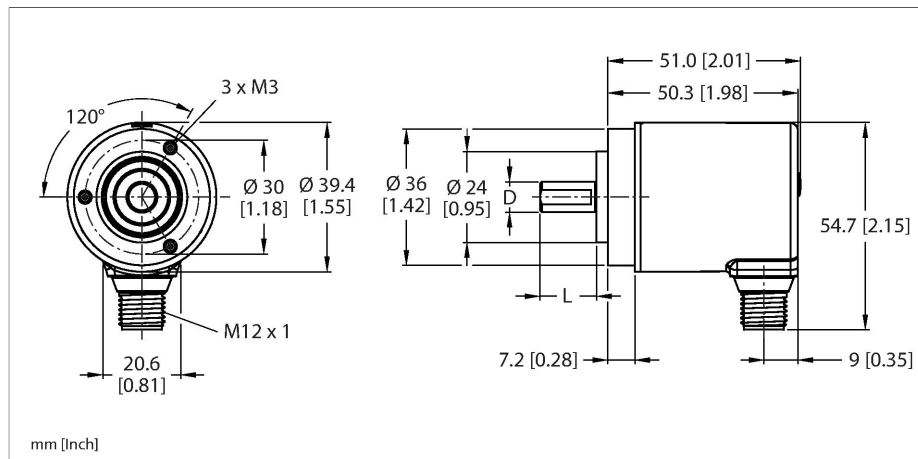


Technical data

Type	REM-97S6C-7AAR-H1151
ID	100011295
Measuring principle	Magnetic
General data	
Max. rotational speed	4000 rpm
Starting torque	< 0.01 Nm
Absolute accuracy	± 1 ° At 25 °C
Output type	Absolute multiturn
Electrical data	
Operating voltage U _B	10...30 VDC
No-load current	≤ 38 mA
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Output function	Analog output
Current output	4...20 mA
Mechanical data	
Flange type	Clamping flange
Flange diameter	Ø 36 mm
Shaft Type	Solid shaft
Shaft diameter D (mm)	6
Shaft Length L [mm]	12.5
Shaft material	Stainless steel
Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
Axial shaft load	20 N
Radial shaft load	40 N

Features


- Clamping flange, Ø 36 mm
- Solid shaft, Ø 6 mm × 12.5 mm
- Magnetic measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- -40...+85 °C
- Max. 4000 rpm (continuous operation 2000 rpm)
- Energy harvesting technology
- 10...30 VDC
- Analog output, 4...20 mA per 16 CW revolutions
- 12-bit resolution
- M12 × 1 male connector, 5-pin

Wiring diagram

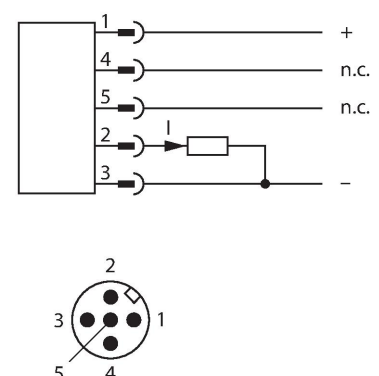

Technical data

Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	2500 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

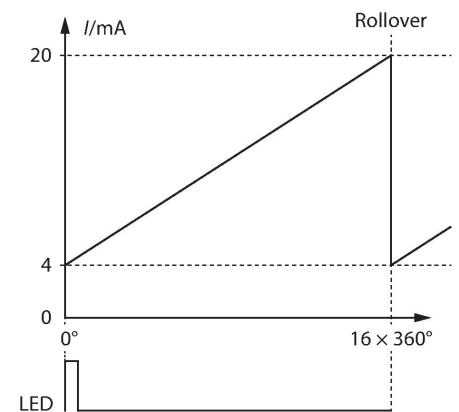

Accessories

RA-BC-20-06-06 rev 16/15	100048777 Bellows coupling with aluminum hub $\varnothing 20$ mm; $d_1 = 6$ mm, $d_2 = 6$ mm	RA-BC-20-06-08 rev 16/15	100048778 Bellows coupling with aluminum hub $\varnothing 20$ mm; $d_1 = 6$ mm, $d_2 = 8$ mm
RA-BC-20-06-10 rev 16/15	100048779 Bellows coupling with aluminum hub $\varnothing 20$ mm; $d_1 = 6$ mm, $d_2 = 10$ mm	RA-BC-E-20-06-06 rev 16/15	100048785 Stainless steel bellows coupling $\varnothing 20$ mm; $d_1 = 6$ mm, $d_2 = 6$ mm
RA-BC-E-20-06-10 rev 16/15	100048786 Stainless steel bellows coupling $\varnothing 20$ mm; $d_1 = 6$ mm, $d_2 = 10$ mm	RA-SDC-30-06-10 rev 16/15	100048791 Spring disc coupling $\varnothing 30$ mm; $d_1 = 6$ mm, $d_2 = 10$ mm
RA-SDC-30-06-06 rev 16/15	100048790 Spring disc coupling $\varnothing 30$ mm; $d_1 = 6$ mm, $d_2 = 6$ mm	RA-HC-25-06-06 rev 16/15	100048794 Aluminum helix coupling $\varnothing 25$ mm; $d_1 = 6$ mm, $d_2 = 6$ mm
RA-HC-25-06-10 rev 16/15	100048795 Aluminum helix coupling $\varnothing 25$ mm; $d_1 = 6$ mm, $d_2 = 10$ mm		

Accessories

Dimension drawing	Type	ID	
	RKC4.5T-2/TEL	6625016	Connection cable, M12 female connector, straight, 5-pin, cable length: 2 m, jacket material: PVC, black; cULus approval

