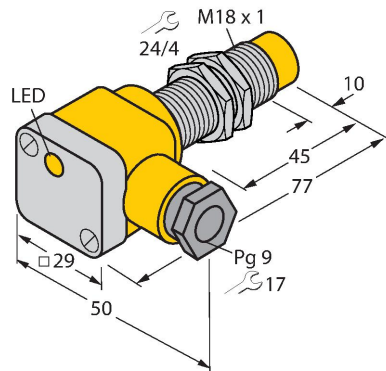


# NI12U-EG18SK-VP4X


## Inductive Sensor



### Features

- Threaded barrel, M18 x 1
- Stainless steel, 1.4301
- Factor 1 for all metals
- Protection class IP68
- Resistant to magnetic fields
- Extended temperature range
- High switching frequency
- DC 4-wire, 10...65 VDC
- Changeover contact, PNP output
- Terminal chamber

### Wiring diagram



### Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox Factor 1 sensors have significant advantages due to their patented ferrite-coreless multi-coil system. They detect all metals at the same large switching distance and are resistant to magnetic fields.

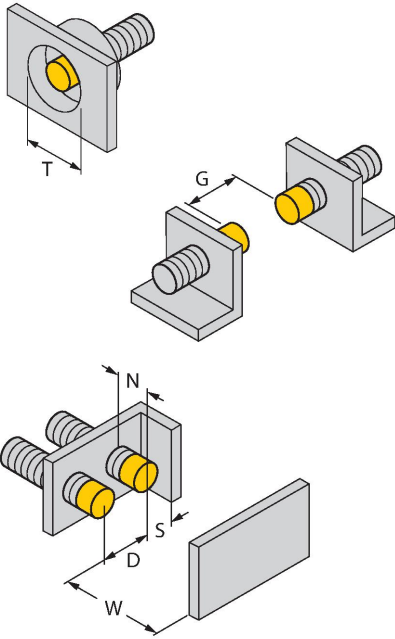
### Technical data

|                                        |                                                                      |
|----------------------------------------|----------------------------------------------------------------------|
| Type                                   | NI12U-EG18SK-VP4X                                                    |
| ID                                     | 1581801                                                              |
| General data                           |                                                                      |
| Rated switching distance               | 12 mm                                                                |
| Mounting conditions                    | Non-flush                                                            |
| Secured operating distance             | $\leq (0.81 \times S_n)$ mm                                          |
| Repeat accuracy                        | $\leq 2 \%$ of full scale                                            |
| Temperature drift                      | $\leq \pm 10 \%$                                                     |
|                                        | $\leq \pm 15 \%, \leq -25^\circ\text{C} \vee \geq +70^\circ\text{C}$ |
| Hysteresis                             | 3...15 %                                                             |
| Electrical data                        |                                                                      |
| Operating voltage $U_B$                | 10...65 VDC                                                          |
| Ripple $U_{ss}$                        | $\leq 10 \%$ $U_{Bmax}$                                              |
| DC rated operating current $I_o$       | $\leq 200$ mA                                                        |
| No-load current                        | $\leq 15$ mA                                                         |
| Residual current                       | $\leq 0.1$ mA                                                        |
| Isolation test voltage                 | 0.5 kV                                                               |
| Short-circuit protection               | yes/Cyclic                                                           |
| Voltage drop at $I_o$                  | $\leq 1.8$ V                                                         |
| Wire break/reverse polarity protection | yes/Complete                                                         |
| Output function                        | 4-wire, Complementary contact, PNP                                   |
| DC field stability                     | 300 mT                                                               |
| AC field stability                     | 300 mT <sub>ss</sub>                                                 |
| Insulation class                       | □                                                                    |
| Switching frequency                    | 1 kHz                                                                |
| Mechanical data                        |                                                                      |
| Design                                 | Threaded barrel, M18 x 1                                             |





Technical data

|                                       |                                           |
|---------------------------------------|-------------------------------------------|
| Dimensions                            | 77 mm                                     |
| Housing material                      | Stainless steel, 1.4301 (AISI 304)        |
| Terminal chamber cover material       | plastic, Ultem                            |
| Terminal chamber housing material     | plastic, PA12-GF30                        |
| Active area material                  | Plastic, PBT                              |
| Max. tightening torque of housing nut | 25 Nm                                     |
| Electrical connection                 | Terminal chamber                          |
| Clamping ability                      | ≤ 1.5 mm²                                 |
| Cable external diameter               | 4.5...8 mm                                |
| Environmental conditions              |                                           |
| Ambient temperature                   | -30...+85 °C                              |
| Vibration resistance                  | 55 Hz (1 mm)                              |
| Shock resistance                      | 30 g (11 ms)                              |
| Protection class                      | IP68                                      |
| MTTF                                  | 874 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state                       | LED, Yellow                               |
| Included in delivery                  | cable gland; 2x plastic seals             |

Mounting instructions

| Mounting instructions/Description                                                   |                        |         |
|-------------------------------------------------------------------------------------|------------------------|---------|
|  | Distance D             | 3 x B   |
|                                                                                     | Distance W             | 3 x Sn  |
|                                                                                     | Distance T             | 65 mm   |
|                                                                                     | Distance S             | 1.5 x B |
|                                                                                     | Distance G             | 6 x Sn  |
|                                                                                     | Distance N             | 2 x Sn  |
|                                                                                     | Diameter active area B | Ø 18 mm |
|                                                                                     |                        |         |
|                                                                                     |                        |         |

Accessories

|                                                                                   |         |                                                                                                                                                                                              |                                                                                    |         |                                                                                |
|-----------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------|--------------------------------------------------------------------------------|
| QM-18                                                                             | 6945102 | Quick-mount bracket with dead-stop; material: Chrome-plated brass. Male thread M24 × 1.5. Note: The switching distance of the proximity switches may change when using quick-mount brackets. | BST-18B                                                                            | 6947214 | Mounting clamp for threaded barrel sensors, with dead-stop; material: PA6      |
|  |         |                                                                                                                                                                                              |  |         |                                                                                |
| MW18                                                                              | 6945004 | Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)                                                                                                 | BSS-18                                                                             | 6901320 | Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene |
|  |         |                                                                                                                                                                                              |  |         |                                                                                |