



Vibration & Temperature Sensor With Serial Interface Modbus RTU QM30VT2-SS-QP

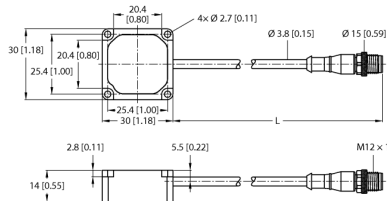

Type	QM30VT2-SS-QP
ID	3806273
Wireless data	
Function	Vibration sensor
Device type	Sensor
I/O data	
Communication protocol	Modbus RTU
	RS485
Electrical data	
Operating voltage U_s	10...24 VDC
Mechanical data	
Design	Rectangular, QM30VT
Housing material	Stainless steel
Electrical connection	Cable with connector, M12 × 1, 0.15 m
Antenna connection	No radio participant
Ambient temperature	-40...+105 °C
Protection class	IP69
Tests/approvals	

- For detecting temperature and vibration values
- Robust stainless-steel housing
- Protection classes IP67/IP69K
- PVC cable, 150 mm, with male connector, M12 × 1, 5-pin
- Shock resistant up to 400 g
- BWA-BK-023 mounting plate kit included in delivery
- Temperature measuring range: -40... 105 °C
- Resolution: 1 °C
- Accuracy: ± 3 °C
- Vibration measuring range: 0...46 mm/s RMS
- Frequency range: 10...4000 Hz
- Accuracy: ± 10 % at 25 °C
- Operating voltage: 10...24 VDC or 3.6... 5.5 VDC
- RS485 interface, supports Modbus RTU

Wiring Diagram

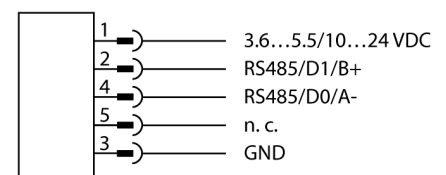

Functional principle

This sturdy sensor in a metal housing was developed to monitor vibrations and the temperature of moving machine parts. The data can be transferred to a controller via the RS485 in-

terface, thus enabling an imminent failure of the machine to be identified at an early stage and corrective action to be taken. The rugged housing is IP67-rated and allows the detection of vibrations on two axes. The sensor can be mounted or stuck on the machine with the relevant accessories.

Accessories

Type code	Ident no.		Dimension drawing
BWA-QM30-FTSS	3810634	Mounting plate kit for QM30VT-SS sensors, stainless steel, screw set included	

Function accessories

Type code	Ident no.		Dimension drawing
BWA-HW-006	3081325	Converter cable, RS485 to USB 2.0 converter, female connector, M12 × 1, 5-pin, male connector, USB type A, length 1 m; supplies the connected device with 10 V. An external power supply via a Y-splitter (6634679) is recommended for the connected device	