


# excom I/O System

## Potentiometer Module, 4-channel

### AI43-N

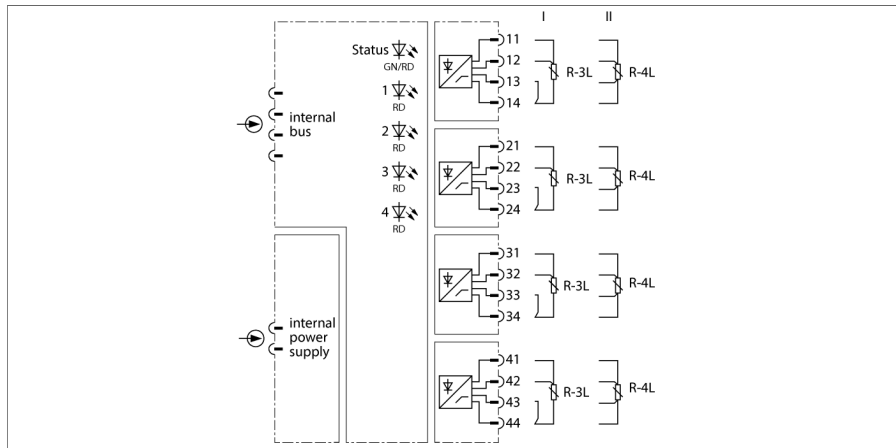

The analog input module AI43-N is used for the connection of potentiometers in 3 or 4-wire technology. If 3-wire potentiometers are used, the terminals at the module rack have to be bridged. Resistance measurements, i.e. the evaluation of potentiometers with a 2-wire connection, is not possible.

The module has four field circuits to control 3 or 4-wire potentiometers. The field circuits are galvanically isolated from the power supply, from the internal bus and from each other.

Each potentiometer input is monitored for wire break. The interruption of a single connection line is securely detected, as well as any combination of interruptions occurring at the four input connection lines. Short-circuit monitoring is not carried out. In case of a line error, the programmed substitute value is immediately output and the output value is set to 'invalid-bit'. This state is maintained until valid measured values are provided again.

The resolution is 14 bit. For clear reading, 0... 100 % is digitized and displayed in a range of 0...10000 (independent of the parametrized measuring range) and transmitted to the host system.

- Input module for the connection of potentiometers
- Complete galvanic isolation



## Dimensions

Type	AI43-N
ID	6884217
Supply voltage	Via module rack, central power supply module
Power consumption	≤ 1.5 W
Galvanic isolation	Complete galvanic isolation
Number of channels	4
Input circuits	Potentiometer
Nominal resistance	400 Ω ... 12 kΩ
Reference temperature	25 °C
Resolution	14 Bit
Linearity deviation	≤ 0.1 % full scale
Temperature drift	≤ 0.005 % of full scale/K
Rise time/fall time	≤ 50 ms (10...90 %)
Ex approval acc. to conformity certificate	IECEX TUR 21.0012X
Ex approval acc. to conformity certificate	TÜV 21 ATEX 8643 X
Device designation	Ex II 3 G Ex ec IIC T4 Gc
Displays/Operating elements	
Operational readiness	1 × green/red
State/ Fault	4 × red
Housing material	Plastic
Connection mode	module, plugged on rack
Protection class	IP20
Ambient temperature	-40...+70 °C
Relative humidity	≤ 93 % at 40 °C acc. to IEC 60068-2-78
Vibration test	Acc. to IEC 60068-2-6
Shock test	Acc. to IEC 60068-2-27
EMC	Acc. to EN 61326-1 Acc. to Namur NE21
MTTF	71 years acc. to SN 29500 (Ed. 99) 40 °C
Dimensions	18 x 118 x 106 mm
Approvals	ATEX cFMus cFM IECEX CE

