



LED Signal Light Tower Light CL50BXXAOS4IPQ

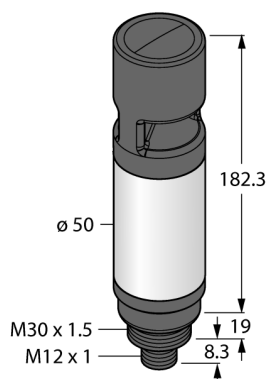

- LED tower light with beeper, max. 99 dB, omnidirectional, intensity regulation
- Individually controllable
- Mechanical screw-in thread M30 x 1.5
- Monochrome: Blue (COL 1)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN

Wiring Diagram

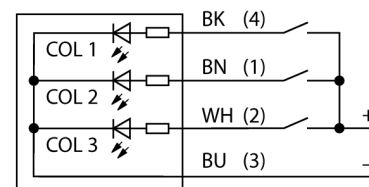

General description

Multicolor multifunction acoustic signaller
Rugged and well-priced LED tower, easy to install
Illuminated segments for clear operator guidance and display of system status.
Display of up to 3 colors.
Compact devices, no controller required
No mounting
The wiring diagram shows the PNP input configuration. An instruction leaflet with detailed information about the connection is included with the devices.

Type	CL50BXXAOS4IPQ
ID	3800014
Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Blue
Dimmable	No
Features of color 1	Blue, Permanently on, 28 lm
Acoustic signal	Staccato with adjustable intensity, 95dB
Electrical data	
Operating voltage U_o	18...30 VDC
Max. current consumption per color	100 mA
Max. current consumption of beeper	45 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Smooth barrel, CL50
Dimensions	Ø 50 x 182.2 mm
Housing material	Plastic, ABS/Polycarbonate, Black
Window material	Polycarbonate, diffuse
Electrical connection	Connector, M12 x 1, PVC
Number of cores	5
Ambient temperature	-20...+50 °C
Relative humidity	0...95%
Protection class	IP67
Tests/approvals	
Approvals	CE, UL listed